

Designed to fit
TUG30



TUG30
Designed to fit

Max output
2649 bhp



TUG30
Designed to fit

Bollard pull
25 tons



TUG30
Designed to fit

Main engine
**2 x CATERPILLAR
C32**



TUG30
Designed to fit

Length **30.00**
Breadth **8.50 m**
Draft **3.48 m**



TUG30
Designed to fit

Speed
13.7 kn



TUG30
Designed to fit

Propulsion
KORSØR PROPELLER
CP 23-RO Ø1980 mm
IN STEERING NOZZLE



TUG30
Designed to fit

Performance
TOWING HOOK
TOWING WINCH
ROLLS-ROYCE
600 m STEEL ROPE
TOWING PIN














TUG30
Designed to fit

Radio
Navigation area
A1+A2+A3



TUG30
Designed to fit

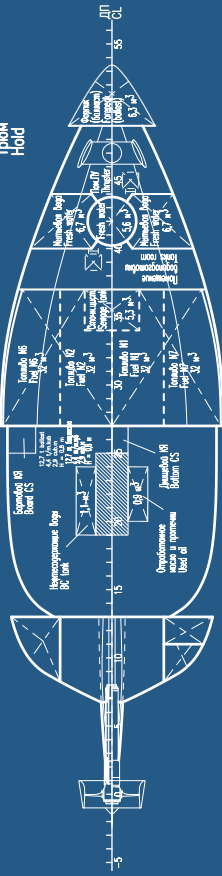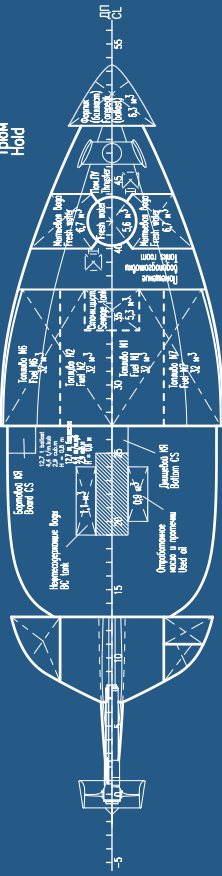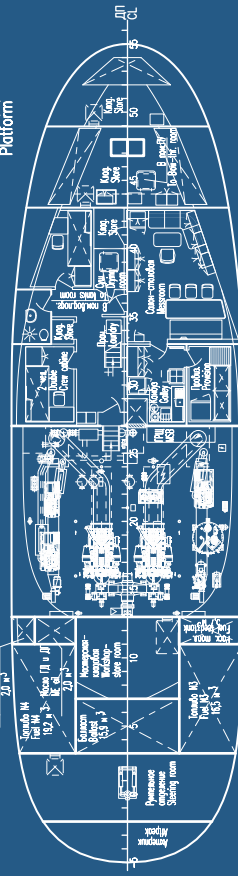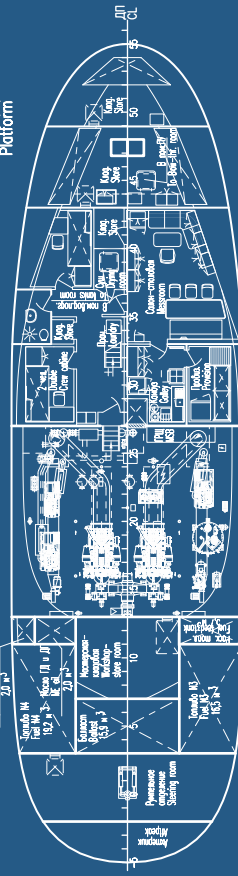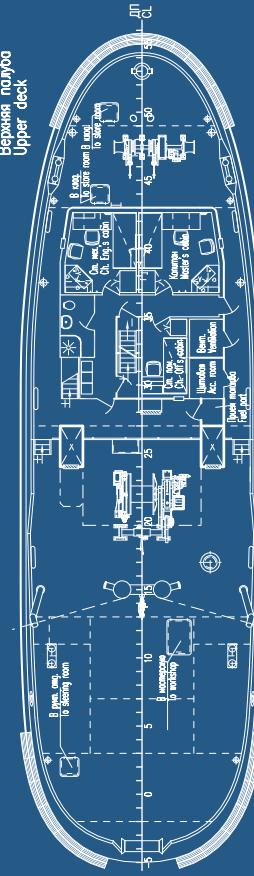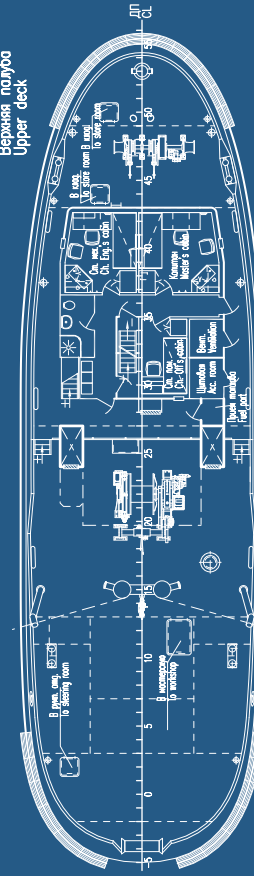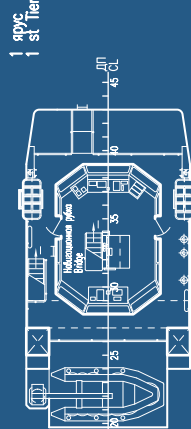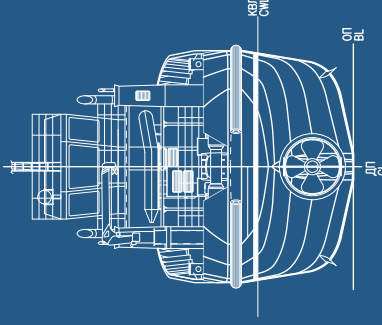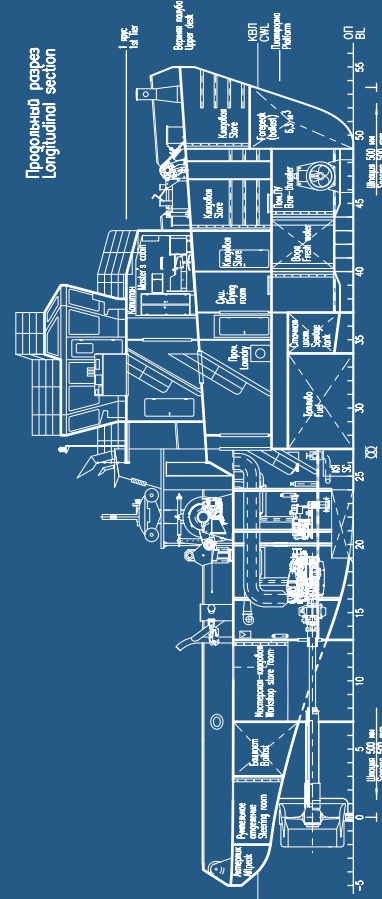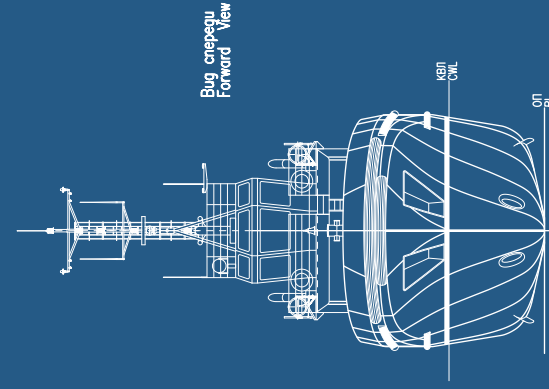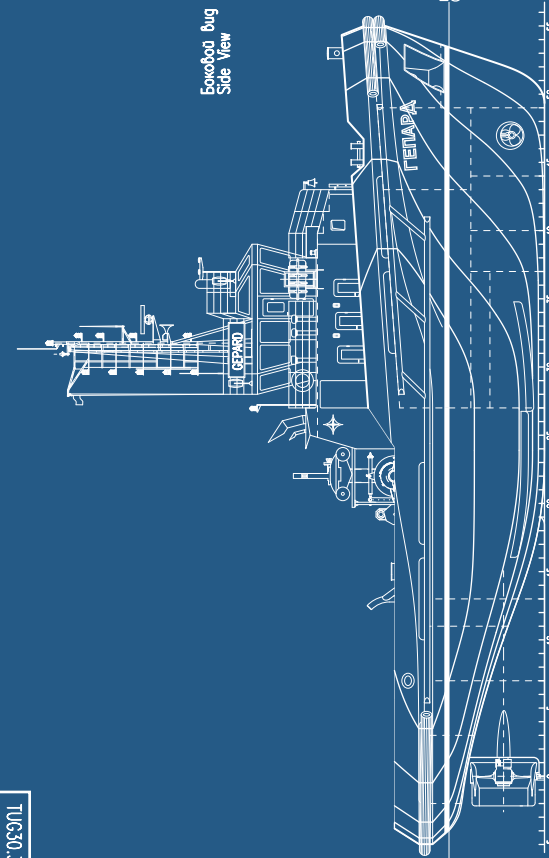

Main Characteristics	
Length overall, m	30.00
Length between perpendiculars, m	26.75
Breadth, m	8.50
Depth, m	4.40
Draft, m	3.48
Displacement, mt	444.58
Main engine, kW	28970
Ballast pull, t	25
Speed, kn	13.7
Crew, pers.	7
RMRS Class	KM@lez2 [1] RI AUT3
Основные характеристики	
Длина наибольшая, м	30.00
Длина между перпендикулярами, м	30.00
Ширина, м	8.50
Высота борта, м	4.40
Осадка, м	3.48
Водоизмещение, т	444.58
Мощность ГД, кВт	28970
Таговое усилие, т	25
Скорость, узл.	13.7
Число мест	7
Класс РМРС	KM@lez2 [1] RI AUT3
Tug / Salvage ship	

[illegible]

TUG30

Designed to fit

TYPE: Tug/Salvage ship

VESSEL CLASS: KM  Ice2  R1 AUT3 Tug / Salvage ship

CLASSIFICATION SOCIETY: RMRS

ICE CLASS	ICE2
TOTAL OUTPUT, BHP	2649
BOLLARD PULL, T	25

PARTICULARS

Length overall, m	30,00
Breadth, m	8,50
Depth, m	4,40
Draught, m	3,48
GRT, t	234
NRT, t	70
Deadweight, t	128,38
Displacement, t	444,58

PERFORMANCE

Total output, bhp	2649
Bollard pull, t	25
Speed, kn	13,7
Radio Navigation area	A1+A2+A3
Working temperature	from - 25 °C up to +45 °C

TANK CAPACITY

Fuel, t	89,58
Lube oil, t	2,66
Fresh water, t	18,94
Sewage, m³	5,29

ACCOMMODATIONS

Single cabin	3
Double cabin	2

DECK MACHINERY (EQUIPMENT)

Anchor winch	ROLLS-ROYCE AW19G2H
Anchor	AC-14, 360 kg x 2
Anchor chain	Steel 22 mm, 3 grade, 165 x 1, 137,5 x 1
Towing hook	MAMPAEY DCX 50/65
Towing winch	Rolls-Royce TW 1000/100 H, with 600 m steel rope
Hydraulic towing pin	DTP 12 SH, Data Hidrolik Makina Sanayi A.S.

PROPULSION MACHINERY

Main Engine	2 x CATERPILLAR C32 1320 hp
Propulsion system	KORSØR PROPELLER CP 23-RO PROPELLER SYSTEM STEERING NOZZLE, Ø1980 mm
Auxiliary Generator	2 x CATERPILLAR C 4.4 DINA (42,7 kW)
Emergency Generator	1 x CATERPILLAR C 2.2 DINA (25,7 kW)

TUG30

Designed to fit

NAVIGATIONAL EQUIPMENT AND CONTROL SYSTEMS

Radio stations	FURUNO VHF FM-8800S x 2
INMARSAT C	FURUNO FELCOM-15 x 2
EPIRB	MCMURDO E5 SMARTFINDER
SART	MYCCOH-502
Two-way VHF radiotelephony	ICOM GM-1600E x 2
AIS transponder	FURUNO FA-150
NAVTEX	FURUNO NX-700B
GPS	GP-37, FURUNO DE S/A
Radar	M-1954C, FURUNO DE S/A
Magnetic Compass	REFLECTA 1, CASSENS& PLATH GMBH
Public address system	SPA-1500, JOTRONPHONETECH AS
Command Intercom System	LH-3000, FURUNO DE S/A
Machinery alarm warning system and Tank and structures level control	DZA07, Boning Automationstechnologie



